


DIPOKET Extrusion

Ref. A01177



IP20

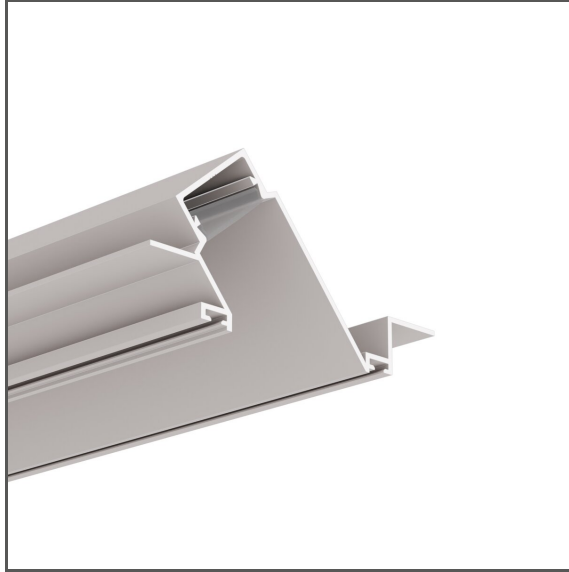

- Linear gallery, stage or exhibition lighting
- The lighting fixture integrates with the mounting surface
- Hidden light source
- Lighting angle: 50 Degrees
- Mounting to 12,5 mm - 0.50" drywall
- Stable mounting to a suspended ceiling

APPLICATION

- decorative lighting and functional

MOUNTING


- in drywall, with screws
- can be easily connected into runs and systems

ADDITIONAL INFORMATION

- the best results are achieved by using a single LED strip centrally placed in a fixture with a transparent cover
- in order to protect the lighting fixture during installation, a TECH-22 protective insert should be used
- standard lengths of KLUŠ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŠ

TECHNICAL DRAWING

1:2

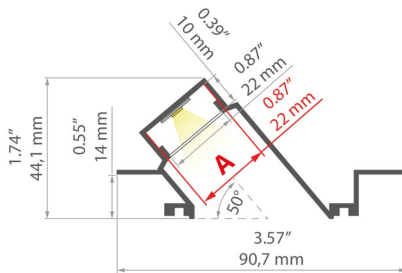

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Width	3.6"
Height	1.7"
LED gluing width A	0.9"
Number of LED strips A (0.31" wide)	1
Width of the glow	22 mm
Max power of a single KLUŠ LED strip	7.3 W/ft
Lighting at an angle	50
Possibility of obtaining a line of light	yes
Building type	Entertainment/ Arts, Retail, Hotel / Restaurant
Facility zone	wall lighting, shop windows and exhibition, communication routes and corridors
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Decorative lighting	yes


Color	Length	Ref
non anodized	39.4"	A01177N_1
	78.9"	A01177N_2
<input type="checkbox"/> white lacquered	78.9"	A01177L10OD_2
	118.5"	A01177L10OD_3

DIPOKET Extrusion

Ref. A01177

Functional lighting	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes

SAMPLE PROJECTS

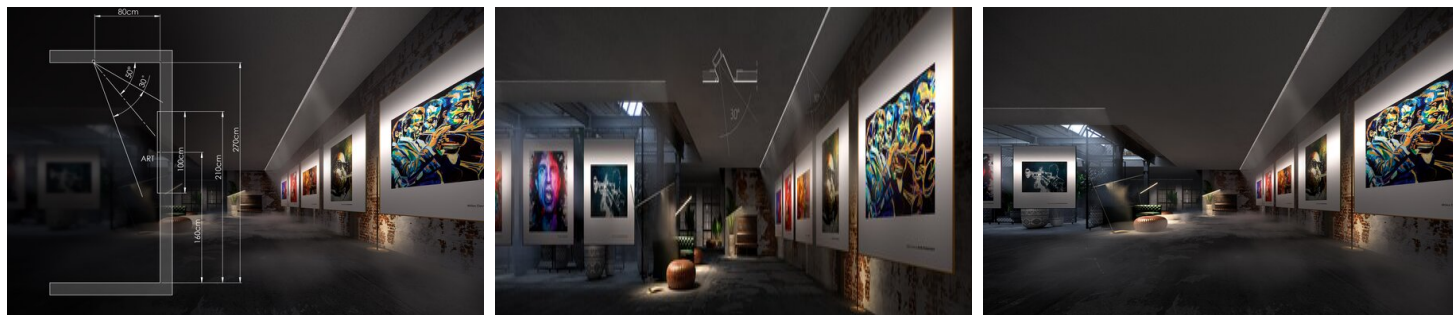


RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
HS-22 Cover	PC	65 %	frosted	B17011F
		88 %	clear	B17011C


RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
End cap set DIPOKET	PP	gray	C24461C02
		white	C24461C10


RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM



K-22/50-1728-24V
K-22/50-1728-24




K-30/18-1770-010V-24V
K-30/18-1770-010V-24V




KWP-G22/50-1728-24
KWP-G22/50-1728-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY




K-HEHD-0480-24
K-HEHD-0480-24



K-HEHD-0960-24
K-HEHD-0960-24



K-HEHD-1440-24
K-HEHD-1440-24




K-HEHD-1920-24
K-HEHD-1920-24


RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT




K-RGBW-1530-24
K-RGBW-1530-24



K-RGB-0700-120-24
K-RGB-0700-120-24




K-RGB-1200-120-24
K-RGB-1200-120-24



K-RGB-1920-120-24
K-RGB-1920-120-24

RELATED ACCESSORIES > OTHER ACCESSORIES > ADDITIONAL ITEMS




GLAND
M8x1
C42265N00

RELATED ACCESSORIES > OTHER ACCESSORIES > CONNECTORS



CONNECTOR
ZM



CONNECTOR
ZM-NA



CONNECTOR
ZM-NA-PION

RELATED ACCESSORIES > ELECTRONICS > SWITCHES



UNI-11
E61603