


WMP-RGB+CCT DMX

09.28CDU.04189


Important: read all Instructions prior to instalation



Click or to choose the zone, Touch the sliders to dim CCT color (if choose CCT color zone) or RGB color(if choose RGB color zone)

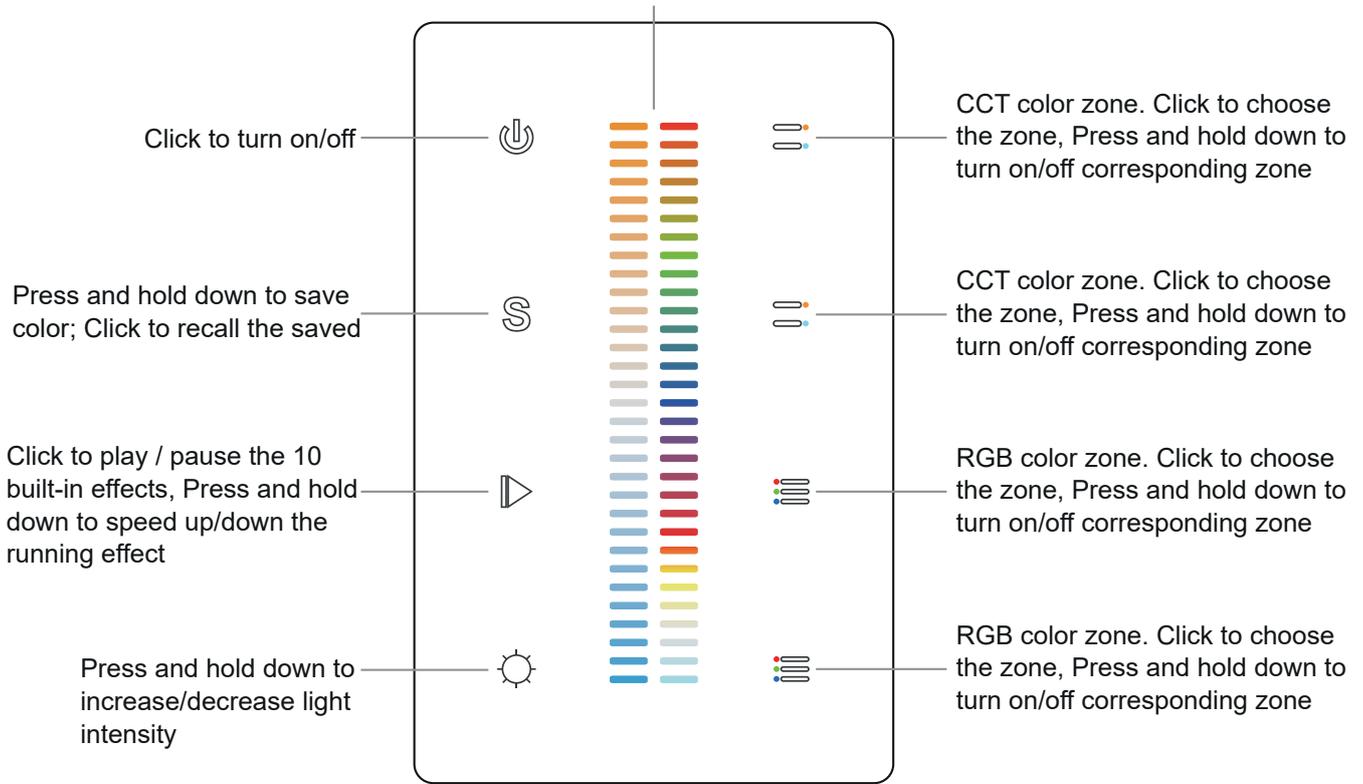

Front side

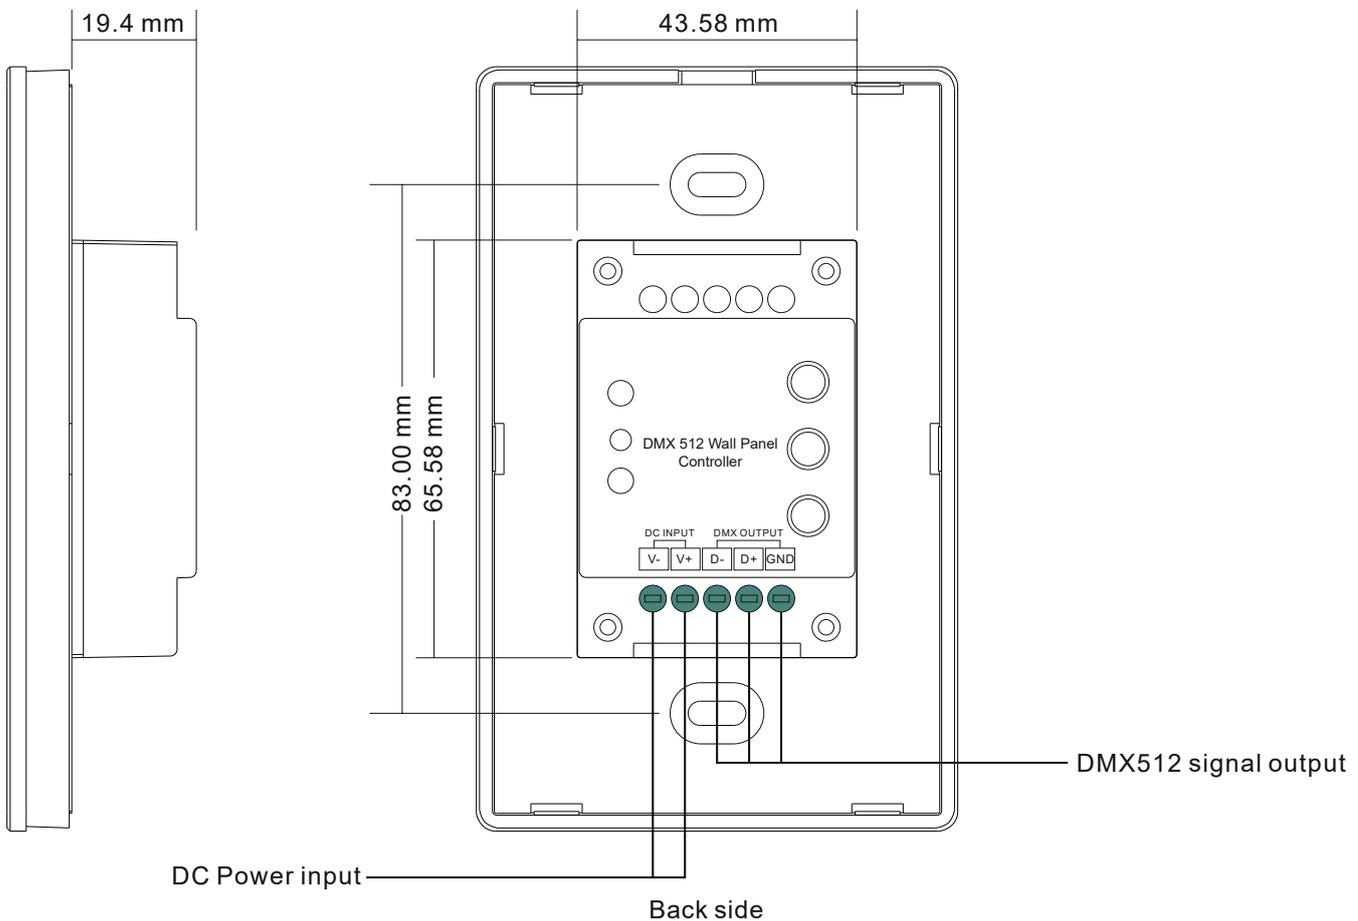

Product Data


Output Signal	DMX512 signal
Power Supply	12-24VDC
Power consumption	200 mA
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	75x120x29.1mm

- Touch sensitive
- Glass interface(white & black)
- Standard DMX512 Signal output
- Control RGB+CCT color
- Control 4 zones synchronously and separately
- Waterproof grade: IP20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Wiring diagram

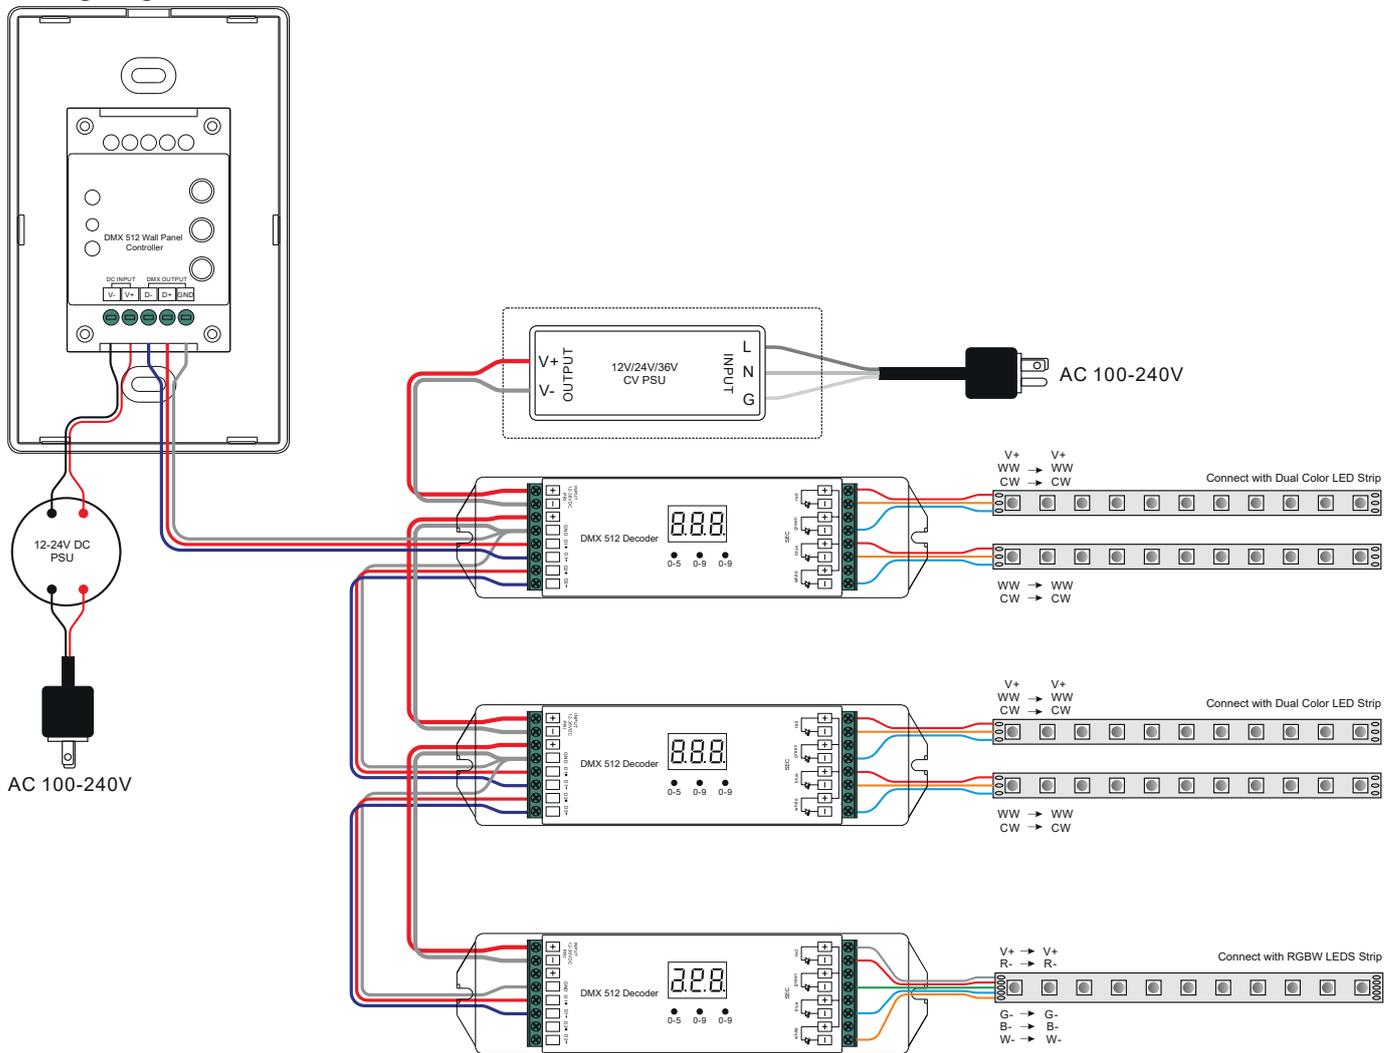

Set DMX Address

Once wiring with DMX decoders is done correctly, please set DMX decoders' address as follows:
 DMX decoders with address 001 will be controlled by zone 1: CW+WW lighting,
 DMX decoders with address 005 will be controlled by zone 2: CW+WW lighting,
 DMX decoders with address 009 will be controlled by zone 3: RGB lighting,
 DMX decoders with address 013 will be controlled by zone 4: RGB lighting.

