


# POKET Extrusion

Ref. A01179



IP20

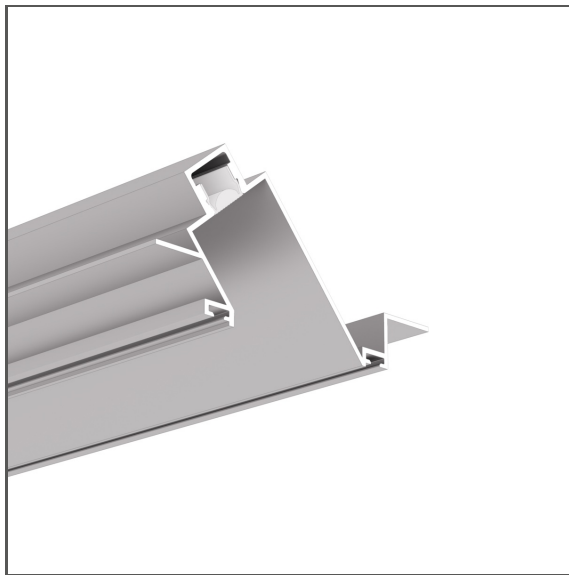

- Linear gallery, stage or exhibition lighting
- The lighting fixture integrates with the mounting surface
- Hidden light source
- Lighting angle: 50 Degrees
- Mounting to 12,5 mm - 0.50" drywall
- Stable mounting to a suspended ceiling

## APPLICATION

- decorative lighting and functional

## MOUNTING


- in drywall, with screws
- can be easily connected into runs and systems

## ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING

1:2

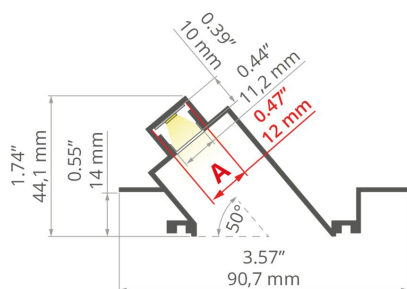

## TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Width	3.6"
Height	1.7"
Number of LED strips A (0.31" wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	7.3 W/ft
Lighting at an angle	50
Possibility of obtaining a line of light	yes
Building type	Entertainment/ Arts, Retail, Hotel / Restaurant
Facility zone	wall lighting, shop windows and exhibition, communication routes and corridors
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
To cover with plaster	yes

Color	Length	LED gluing width A	Ref
■ silver non anodized	39.4"	0.4"	A01179N_1
	78.9"	0.5"	A01179N_2
□ white lacquered	39.4"	0.5"	A01179L10OD_1
	78.9"		A01179L10OD_2




# POKET Extrusion

## Ref. A01179

Wire out back of extrusion

yes

### SAMPLE PROJECTS

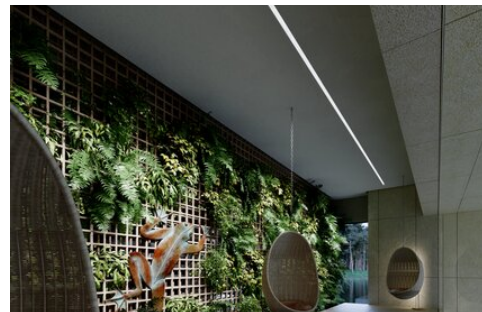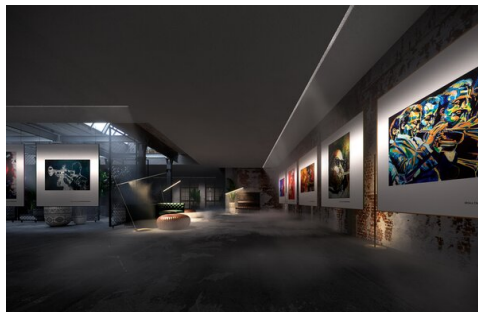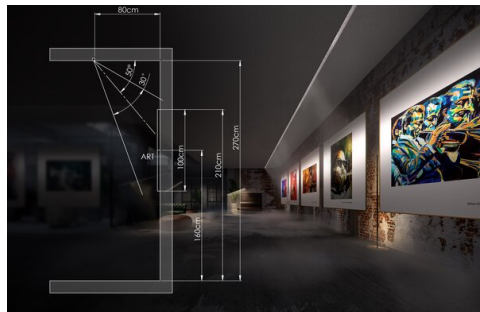

### RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
HS-11 Cover	PC	59 %	frosted	B17208F
		88 %	clear	B17208C

### RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
End cap set POKET	PP	gray	C24460C02
		white	C24460C10


### RELATED ACCESSORIES > RELATED LED > ADJUSTABLE WHITE / DIM TO WARM



**K-22/50-1728-24V**  
K-22/50-1728-24




**K-30/18-1770-010V-24V**  
K-30/18-1770-010V-24V

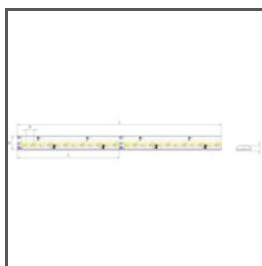


**KWP-G22/50-1728-24**  
KWP-G22/50-1728-24

RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY




**K-HEHD-0480-24**  
K-HEHD-0480-24



**K-HEHD-0960-24**  
K-HEHD-0960-24



**K-HEHD-1440-24**  
K-HEHD-1440-24




**K-HEHD-1920-24**  
K-HEHD-1920-24


RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



**K-RGBW-1530-24**  
K-RGBW-1530-24

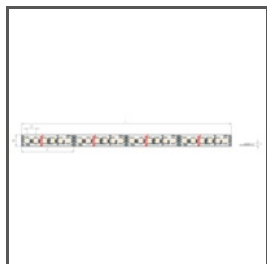

**K-RGB-0700-120-24**  
K-RGB-0700-120-24

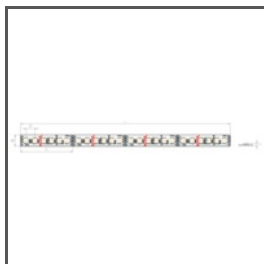

**K-RGB-1200-120-24**  
K-RGB-1200-120-24




**K-RGB-1920-120-24**  
K-RGB-1920-120-24

RELATED ACCESSORIES > OTHER ACCESSORIES > CONNECTORS



CONNECTOR  
**ZM**



CONNECTOR  
**ZM-NA**



CONNECTOR  
**ZM-NA-PION**

RELATED ACCESSORIES > ELECTRONICS > SWITCHES



**UNI-11**  
E61603