

Fixture TALIS-1


Ref. FPTL001



IP20



TECHNICAL DRAWING

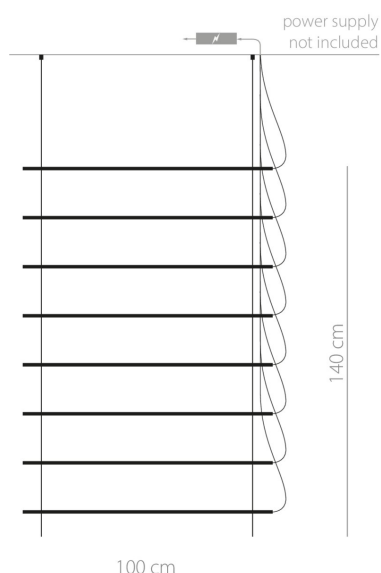

TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	frosted
Control	ON/OFF
Mounting type	suspended
IP protection rating	20
Luminare power	73 W
Input voltage	24 V
Protection class	III

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
■ silver	3664 lm	50 lm/W	3000 K	FPTL001-0130EB
■ silver	4243 lm	58 lm/W	4000 K	FPTL001-0140EB
■ black	3664 lm	50 lm/W	3000 K	FPTL001-0730EB
■ black	4243 lm	58 lm/W	4000 K	FPTL001-0740EB
□ white	3664 lm	50 lm/W	3000 K	FPTL001-1030EB
□ white	4243 lm	58 lm/W	4000 K	FPTL001-1040EB

Fixture TALIS-1

Ref. FPTL001

SAMPLE PROJECTS

