




- UL Listed
- 3-Step MacAdam's ellipse, single binning
- L70- Over 40,000 hours
- Reverse voltage protection
- Minimum 2oz copper PCB

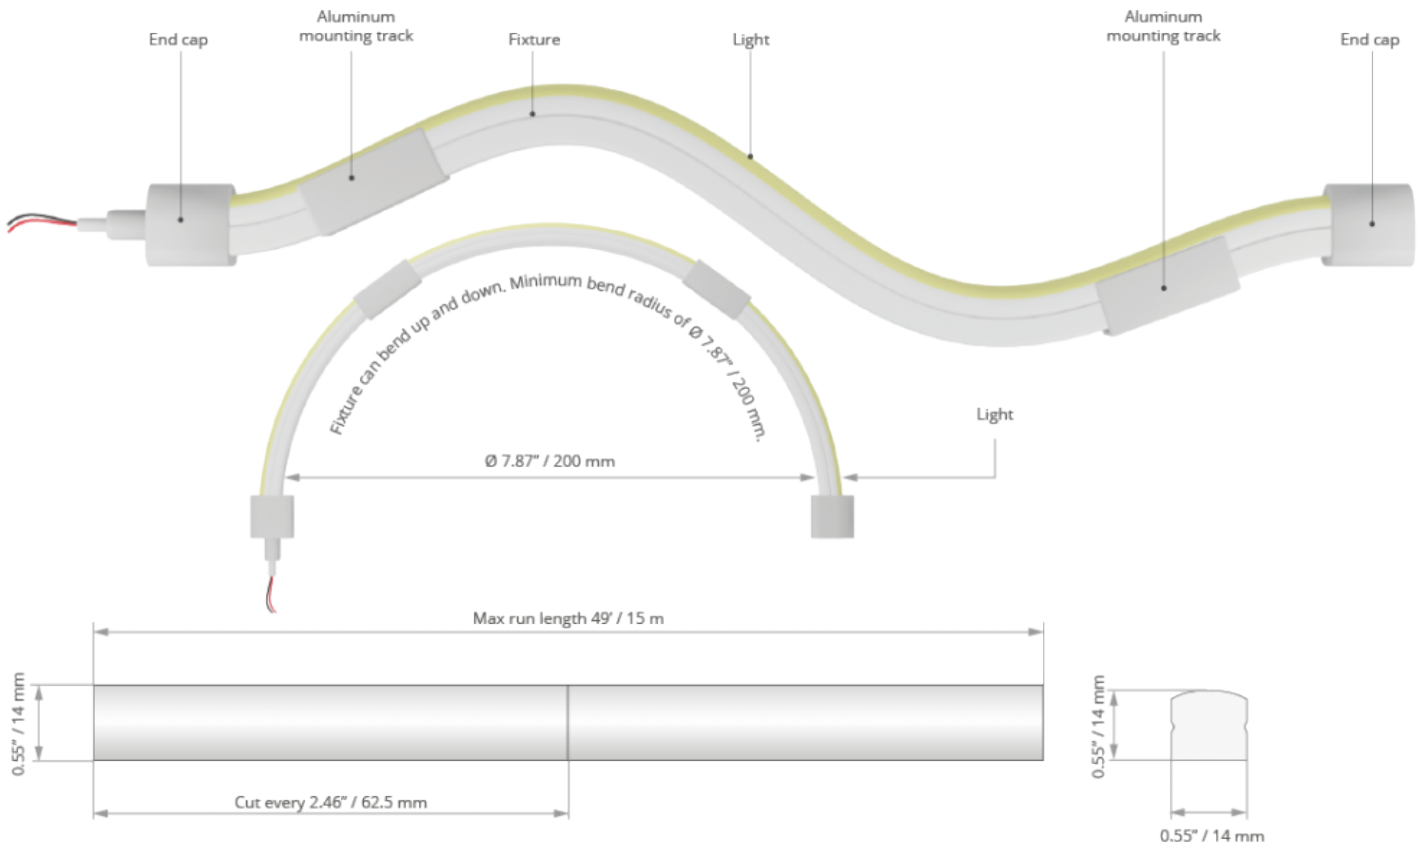


* Custom lengths must be made by the factory to maintain the UL listing


TECHNICAL DATA

Model	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
K-NF-30-0780-24V-5M	IP 67	2.3 W/ft	3000 K ■	125 lm/ft	34 pcs/ft	24 V	113 °	16'4"	14 mm
K-NF-30-0780-24V-10M	IP 67	2.3 W/ft	3000 K ■	125 lm/ft	34 pcs/ft	24 V	113 °	32'	14 mm
K-NF-30-0780-24V-15M	IP 67	2.3 W/ft	3000 K ■	125 lm/ft	34 pcs/ft	24 V	113 °	49'	14 mm
K-NF-35-0780-24V-5M	IP 67	2.3 W/ft	3500 K ■	175 lm/ft	34 pcs/ft	24 V	113 °	16'4"	14 mm
K-NF-35-0780-24V-10M	IP 67	2.3 W/ft	3500 K ■	175 lm/ft	34 pcs/ft	24 V	113 °	32'	14 mm
K-NF-35-0780-24V-15M	IP 67	2.3 W/ft	3500 K ■	175 lm/ft	34 pcs/ft	24 V	113 °	49'	14 mm
K-NF-40-0780-24V-5M	IP 67	2.3 W/ft	4000 K ■	126 lm/ft	34 pcs/ft	24 V	113 °	16'4"	14 mm
K-NF-40-0780-24V-10M	IP 67	2.3 W/ft	4000 K ■	126 lm/ft	34 pcs/ft	24 V	113 °	32'	14 mm
K-NF-40-0780-24V-15M	IP 67	2.3 W/ft	4000 K ■	126 lm/ft	34 pcs/ft	24 V	113 °	49'	14 mm


Model	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
K-NF-50-0780-24V-5M	IP 67	2.3 W/ft	5000 K	124 lm/ft	34 pcs/ft	24 V	113 °	16'4"	14 mm
K-NF-50-0780-24V-10M	IP 67	2.3 W/ft	5000 K	124 lm/ft	34 pcs/ft	24 V	113 °	32'	14 mm
K-NF-50-0780-24V-15M	IP 67	2.3 W/ft	5000 K	124 lm/ft	34 pcs/ft	24 V	113 °	49'	14 mm




ACCESSORIES



Ref. 69015 End cap with hole for K-NF-0780-24V series



Ref. 69014 End cap for K-NF-0780-24V series

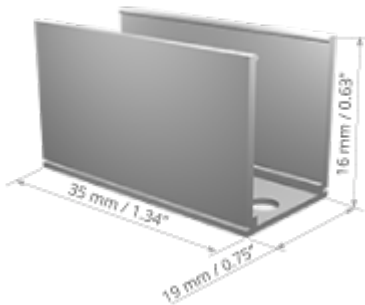

Ref. 69016 Aluminum track (1.38" / 3.5cm) for K-NF-0780-24V series, includes metal mounting clip