


- UL Listed
- 3-Step MacAdam's ellipse, single binning
- L70- Over 40,000 hours
- Reverse voltage protection
- Minimum 3oz copper PCB



TECHNICAL DATA

Model	Chip	IP protection	Power consumption	Color temperature	Lumen output	LED quantity	Input voltage	Beam Angle	Max run length
K-1530-RGB+W-24V	Epistar 2110	IP 20	4.6 W/ft	3000 K	104 lm/ft	115 pcs/ft	24 V	120 °	19'2"
K-1530-RGB+W-24V	Epistar 2110	IP 20	4.6 W/ft	RED	14 lm/ft	115 pcs/ft	24 V	120 °	19'2"
K-1530-RGB+W-24V	Epistar 2110	IP 20	4.6 W/ft	GREEN	101 lm/ft	115 pcs/ft	24 V	120 °	19'2"
K-1530-RGB+W-24V	Epistar 2110	IP 20	4.6 W/ft	BLUE	21 lm/ft	115 pcs/ft	24 V	120 °	19'2"

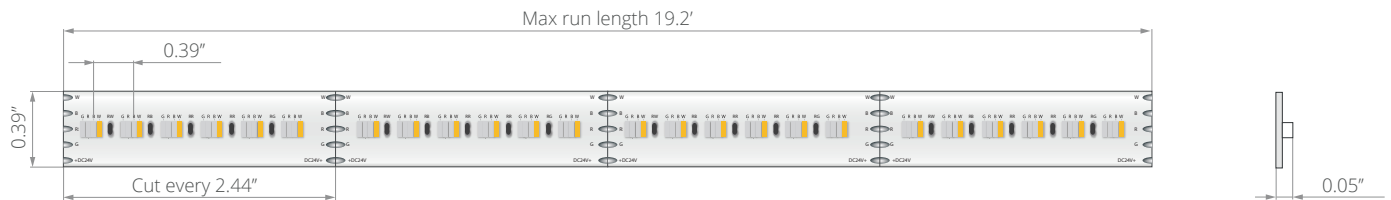

WIRE OPTIONS

