


- UL Listed
- L70- Over 40,000 hours
- Reverse voltage protection
- Minimum 2oz copper PCB



### TECHNICAL DATA

Model	Chip	IP protection	Power consumption	Color temperature	Lumen output	LED quantity	Input voltage	Beam Angle	Max run length
K-1920-120-RGB-24V	Epistar 4040	IP 20	5.85 W/ft	RGB <span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; background-color: white;"></span>	191 lm/ft	38 pcs/ft	24 V	120 °	16'4"
K-1920-120-RGB-24V	Epistar 4040	IP 20	5.85 W/ft	RED <span style="display: inline-block; width: 10px; height: 10px; background-color: red;"></span>	57 lm/ft	38 pcs/ft	24 V	120 °	16'4"
K-1920-120-RGB-24V	Epistar 4040	IP 20	5.85 W/ft	GREEN <span style="display: inline-block; width: 10px; height: 10px; background-color: green;"></span>	120 lm/ft	38 pcs/ft	24 V	120 °	16'4"
K-1920-120-RGB-24V	Epistar 4040	IP 20	5.85 W/ft	BLUE <span style="display: inline-block; width: 10px; height: 10px; background-color: blue;"></span>	25 lm/ft	38 pcs/ft	24 V	120 °	16'4"

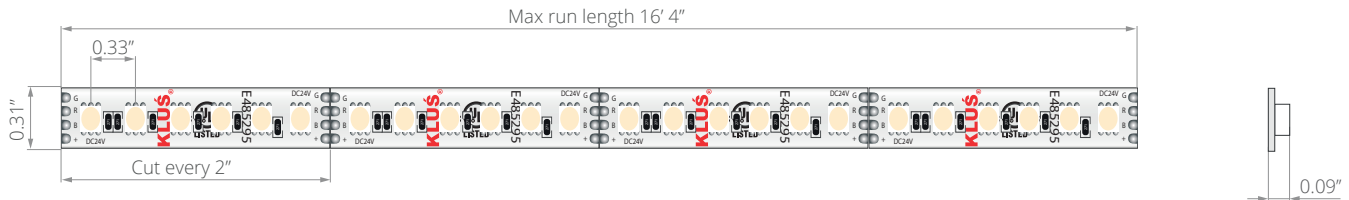

### WIRE OPTIONS

