




DIM TO WARM

*Only to be used with a 0-10V dimmable power supply

- Color temperature: 3000-1800K
- UL Listed
- CRI 90+
- 3-Step MacAdam's ellipse, single binning

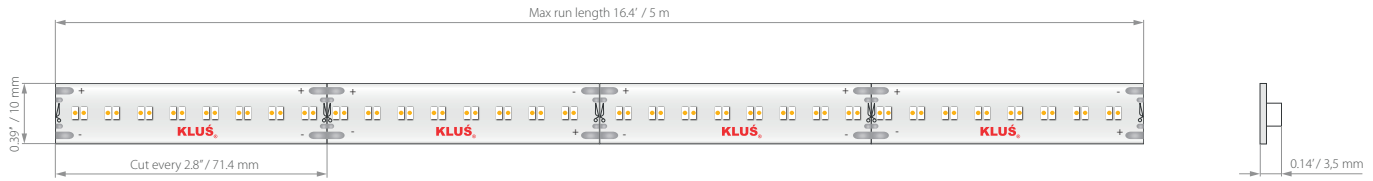


TECHNICAL DATA

Model	Volt	Color Temperature	Watts per foot / per meter	Lumen Output per foot / per meter	Beam Angle	Diodes per foot / per meter	Chip Type	CRI	Max run length (feet / meter)
K-30/18-1770-010V-24V	24	3000-1800 K	3.5W/F 11.5W/M	292L/F 958L/M	120°	68/F 224/M	Epistar 2016	90+	16.4' / 5m



CCT VS LUMEN OUTPUT:

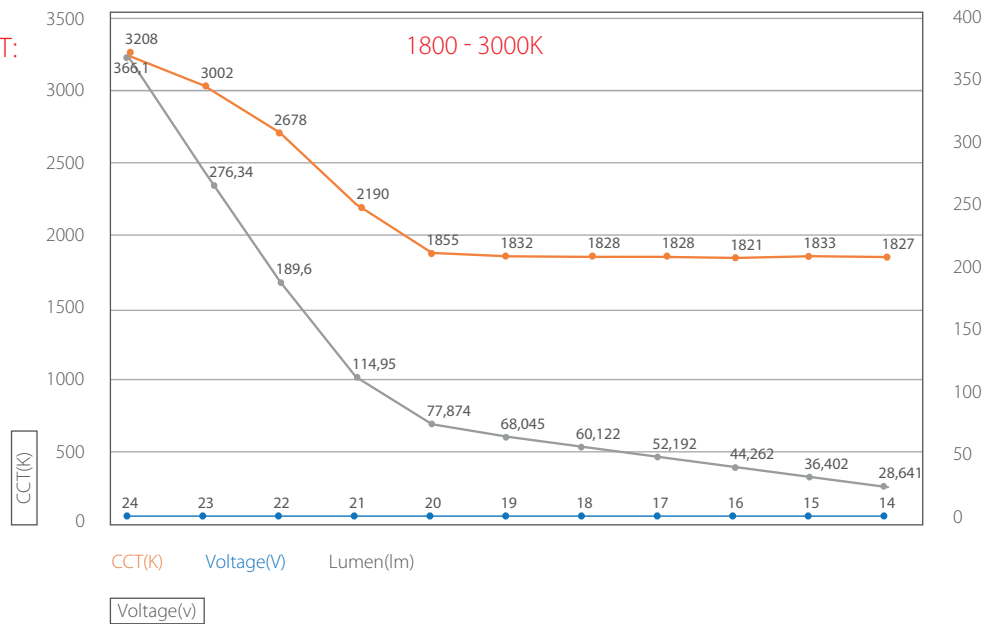

WIRE OPTIONS

36"-72" wire leads (20 gauge jacketed wire)

